


EA20/35 EXCAVATOR AUGERS



**EA20: AVAILABLE FOR: KX018-4 / KX71 / KX033
KX040 / KX057 / KX080
U17 / U27 / U35 / U55**

EA35: AVAILABLE FOR: KX040 / KX057 / KX080 / U55

- EA20 motor options:
6-15 gpm; 10-20 gpm; 15-30 gpm
- EA20: Torque: Up to 2620 ft/lb @ 3000 PSI*
- EA35: 15-30 gpm Motor
- Torque: Up to 2732 ft/lb @ 3000 PSI*
- Drive units can be used with either SA or EA mounts
- All mounts accept cradle option
- Patented level indicator on EA20

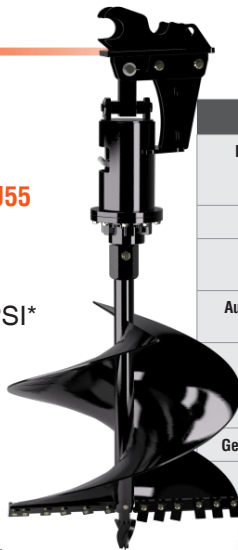

	EA20	EA35
Hydraulic Requirements	6-30 gpm @ 1500 to 3500 psi (22.7-113.6 lpm @ 10.34-24.13 MPa)	10-30 gpm @ 1500 to 3500 psi (37.8-113.6 lpm @ 10.34-24.13 MPa)
Hydraulic Motor		18.3 CID
Base Weight w/o Options (kg)	46 lbs (20.9)	64 lbs (29)
Auger Flighting Thickness (mm)		5/16" (8)
Auger Teeth	Forged, individually replaceable, 40° angle installed on flat side 50° angle installed on angled side	
Gearbox	Hydraulically driven planetary gearbox; reversible	
Gearbox Oil Capacity (mL)	14 oz (414)	1.69 pints (.8 L)
Augers	See SA20/35 specifications on previous page	

Dirt or building contractors and fence contractors can easily reach hard to access areas with an excavator and bore holes for fences, footings, and more. The EA20 is a good rental tool.



A variety of augers are offered ranging from 6" - 24", plus a 36" tree auger. 6" to 18" Rock Augers also available.