

# RC47/57 10' OFFSET ROTARY CUTTERS

HP REQUIRED  
55-250 HP

CUTTING CAPACITY  
4", 5"

HITCH  
Pull-Type




RC5710

## Making roadside cutting safe and efficient.

The RC4710 and RC5710 Rotary Cutters are single wing mowers that are ideal for roadside mowing. The left-hand wing is replaced with a weight box and allows the operator to travel next to the road's shoulder, remaining on more level ground. All the features you love from our 15-foot cutters are there too, in a 10-foot single wing model!

- Left hand weight box
- Optional hitch configurations
- RC47: Optional deck rings  
RC57: Deck rings or DeckArmor™ Optional
- RC57: Replaceable 1/4" sideskirt with replaceable beveled skid shoe
- Smooth top design
- Heavy-duty blade carrier options

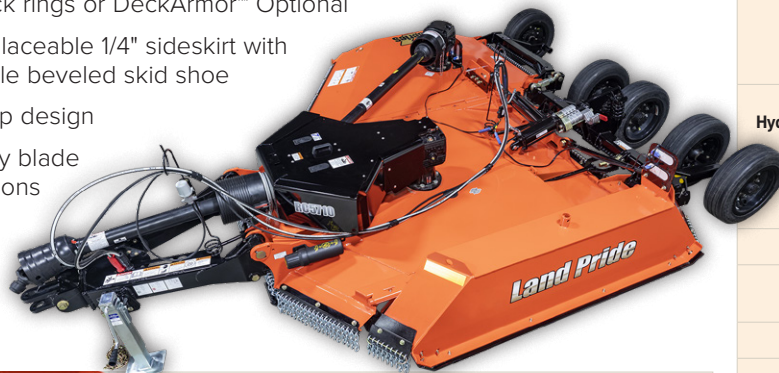

The 10' and 15' Cutters feature a Pre-Cut Chamber. This allows material to spring back up before being cut, giving a cleaner, more precise finish.

**7 YEAR**  
LIMITED GEARBOX  
WARRANTY\*

	RC4710	RC5710	
<b>Horsepower</b>	55-250 HP	60-250 HP	
<b>Hitch</b>	Pull-Type; Standard Swivel Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	Pull-Type; Constant Level Swivel Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	
<b>Working Width (cm)</b>	10' 6" (320)	10' 6" (320)	
<b>Overall Width</b>	11'7"		
<b>Min. Transport Width</b>	7'3"		
<b>Overall Length</b>	16'3"		
<b>Machine Weight - lb (kg)</b>	5,160 (2341)	5,740 (2604)	
<b>Cutting Height</b>	1-1/2" - 16" **		
<b>Cutting Capacity</b>	4" Diameter	5" Diameter	
<b>Tongue Weight - lb</b>	1,948	2,200	
<b>Deck Thickness</b>	10 Gauge	7 Gauge Bottom, 10 Gauge Top	
<b>Max. Turning Angle</b>	80° with CV		
<b>Deck Height</b>	12"		
<b>Suspension</b>	Spring Cushioned Center Axle	Various Options	
<b>Deck Rings</b>	Optional	Deck Rings or DeckArmor™ Optional	
<b>Side Panel Thickness</b>	1/4"	1/4" Replaceable	
<b>Skid Shoes</b>	Wing & Center, Replaceable, Beveled	AR400 Wing & Center, Replaceable, Beveled	
<b>Chain Guards Front &amp; Rear</b>	Single - Standard Double - Optional		
<b>Blades</b>	1/2" x 4" Uplift		
<b>Blade Bolt</b>	Keyed w/Hardened Flatwasher & Lock Nut		
<b>Blade Tip Speed (Feet per minute)</b>	<b>540 Center</b>	16,300 fpm	16,400 fpm
	<b>Wings</b>	16,300 fpm	16,400 fpm
	<b>1000 Center</b>	16,300 fpm	16,400 fpm
	<b>Wings</b>	16,000 fpm	16,000 fpm
<b>Blade Overlap</b>	6"		
<b>Dishpan</b>	Forged Diamond Blade Bar, Optional 3/16" Round Dishpan	Forged Diamond Blade Bar; Optional 3/16" Round Bolt-on Dishpan, Optional HD Blade Bar & Dishpans	
	<b>Wings</b>	2-1/2" x 12"	3" x 8"
<b>Hydraulics</b>	<b>Center</b>	3" x 8"	3-1/2" x 8"
	<b>Gearbox Rating^</b>	540 RPM or 1000 RPM: 250 HP Divider 210 HP Center & Wing    225 HP Center & Wing	
<b>Gearbox Output Shaft</b>	2-3/8"	3"	
<b>Gearbox Input Shaft</b>	1-3/4" 20 Spline	1-3/8" or 1-3/4" 20 Spline	
<b>Input Driveline</b>	Cat. 6 CV		
<b>Connecting Drivelines</b>	Cat. 4 or 5 Slip Clutch		
<b>Tires</b>	21" or 26" Laminated, 29" Used Aircraft, or 24" Foam-Filled	21" or 26" Laminated, 29" Used Aircraft 25.5" Foam-Filled	
<b>Transport Lights</b>	Standard		
<b>Colors</b>			

CUTTERS

\*See dealer for complete warranty information. ^Based on field performance.