

SP20/30 SERIES SOIL PULVERIZERS

HP REQUIRED
25-75 HP

HITCH
Cat. 1


DIRTWORKING



Ideal for leveling and seedbed preparation.

The SP20 and SP30 Soil Pulverizers have aggressive reversible 10 1/2" x 2" x 1/2" Scarifier shanks to rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting.

- Single or double steel spiked roller
- Self-aligning cast 1" bearings with double lip seals
- 1" Diameter shaft in roller

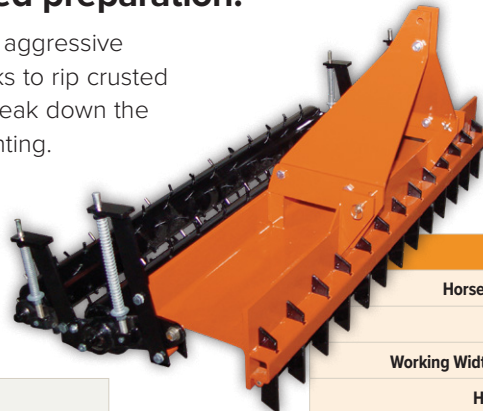

SP30 Series is available with an optional Dual Roller.



Scarifier shanks are reversible for a longer life.



3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.



Heavy 1" diameter shaft can handle the shock loads from the roller.

| | SP2060 | SP2072 | SP3072 | SP3084 |
|---|---|-----------|--|-----------|
| Horsepower | 25-55 HP | | 30-75 HP | |
| Hitch | Cat. 1 | | Cat. 1 | |
| Working Width (cm) | 60" (152) | 72" (182) | 72" (182) | 84" (213) |
| H-Beam | 10" | | 12" | |
| Weight - Sgl Roller - lb (kg) | 491 (223) | 561 (255) | 671 (305) | 721 (328) |
| Front to Back Length - Single Roller | 25-1/2" | | 28-1/4" | |
| No. of Scarifier Shanks | 21 | 25 | 25 | 29 |
| Shank Spacing | 2-13/16" | | 2-13/16" | |
| No. of Spikes on Sgl Roller | 86 | 103 | 103 | 116 |
| No. of Spikes on Dbl Roller | N/A | N/A | 206 | 232 |
| Spiked Roller Tube Diameter | 5-9/16" O.D. | | 6 5/8" O.D. Optional 2nd Roller 5-9/16" | |
| Roller Spike Material | 3/8" x 1-1/4" Steel, Replaceable Heat Treated | | 3/8" x 1-1/4" Steel, Replaceable Heat Treated | |
| Springs | 32 lbs/inch | | Front Roller: 32 lbs/inch Rear Roller: 5 lbs/inch | |
| Colors | | | | |

