

# SP20/30 SERIES SOIL PULVERIZERS

HP REQUIRED  
25-75 HP

HITCH  
Cat. 1


DIRTWORKING



## Ideal for leveling and seedbed preparation.

The SP20 and SP30 Soil Pulverizers have aggressive reversible 10 1/2" x 2" x 1/2" Scarifier shanks to rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting.

- Single or double steel spiked roller
- Self-aligning cast 1" bearings with double lip seals
- 1" Diameter shaft in roller

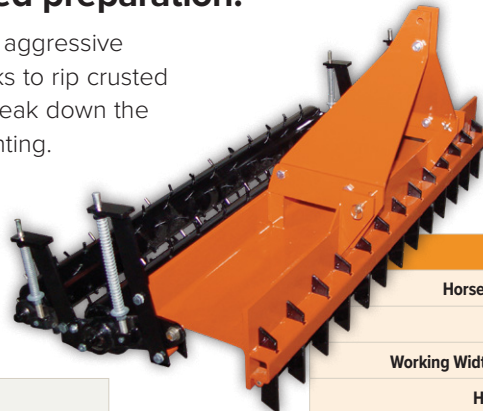

SP30 Series is available with an optional Dual Roller.



Scarifier shanks are reversible for a longer life.



3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.



Heavy 1" diameter shaft can handle the shock loads from the roller.

	SP2060	SP2072	SP3072	SP3084
<b>Horsepower</b>	25-55 HP		30-75 HP	
<b>Hitch</b>	Cat. 1		Cat. 1	
<b>Working Width (cm)</b>	60" (152)	72" (182)	72" (182)	84" (213)
<b>H-Beam</b>	10"		12"	
<b>Weight - Sgl Roller - lb (kg)</b>	491 (223)	561 (255)	671 (305)	721 (328)
<b>Front to Back Length - Single Roller</b>	25-1/2"		28-1/4"	
<b>No. of Scarifier Shanks</b>	21	25	25	29
<b>Shank Spacing</b>	2-13/16"		2-13/16"	
<b>No. of Spikes on Sgl Roller</b>	86	103	103	116
<b>No. of Spikes on Dbl Roller</b>	N/A	N/A	206	232
<b>Spiked Roller Tube Diameter</b>	5-9/16" O.D.		6 5/8" O.D. Optional 2nd Roller 5-9/16"	
<b>Roller Spike Material</b>	3/8" x 1-1/4" Steel, Replaceable Heat Treated		3/8" x 1-1/4" Steel, Replaceable Heat Treated	
<b>Springs</b>	32 lbs/inch		Front Roller: 32 lbs/inch Rear Roller: 5 lbs/inch	
<b>Colors</b>				

