

SW30 ROAD SAWS




new

AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-2 / SVL95-2s

- Hydraulic control of tilt, sideshift and depth
- Either 10" or 18" cutting depth
- 2.5" - 6" Cutting width

Well suited for road contractors, municipalities, and rental yards for cutting utility trenches in concrete or asphalt.

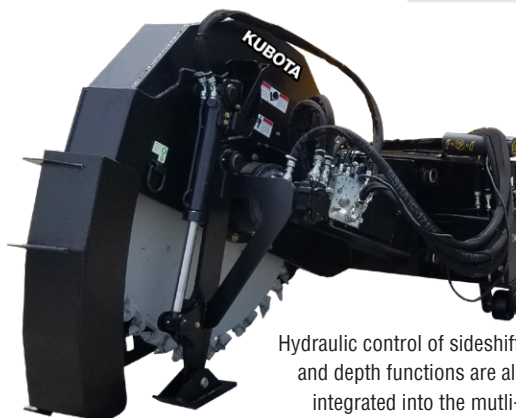

Hydraulic control of sideshift and depth functions are all integrated into the multi-function grips of the SSV/SVL.



Removable carbide picks use rocket fin technology built into the picks for longer life.



Depth indicator makes it easy to know depth of cut being made.

	SW3010	SW3010	SW3018	SW3018	SW3018
Cutting Width (cm)	2-1/2" (6)	4-1/2" (11)	3" (8)	4-1/2" (11)	6" (15)
Cutting Depth (cm)	0" - 10" (0 - 25)		0" - 18" (0 - 46)		
Weight - lbs (kg)	1,323 (600)	1,360 (617)	1,916 (869)	1,970 (894)	2,031 (921)
Number of Picks	26	34	30	48	60
Min. Hydraulic Flow (Lpm)	24 gpm (90)				
Max. Hydraulic Flow (Lpm)	42 gpm (159)				
Min. Pressure (MPa)	2,000 psi (13.8)				
Max. Pressure (MPa)	5,000 psi (34.4)				
Sideshift Travel (cm)	26" (66)				