

TH35 TILT HITCH

AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-2 / SVL95-2s / SVL97-2

- 20° Tilt in either direction
- Angle gauge and level - standard
- Nylon slide pads

Tilts buckets and other attachments to help contractors and landscapers with grading and leveling.



The TH35 tilts buckets and other attachments 20° in either direction to help with grading and leveling.

Angle gauge helps the operator set to desired angle, and the bubble level helps get attachment level.



The TH35 is intended for use with buckets, blades, and other ground-engaging attachments.

	TH35
Weight (kg)	360 lbs (163)
Overall Height (cm)	26.8" (68.1)
Overall Width (m)	51" (1.29)
Overall Length (cm)	7-7/8" (20)
Tilt Capacity	20° in each direction
Tilt Cylinder (cm)	2.5" x 5" x 1.25", 3500 psi (6.4x12.7x3.2, 24.1mPa)
Angle Gauge	Standard
Bubble Level	Standard
Flat Face Couplers	Standard

SH35 SKID STEER HITCH

AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-2 / SVL95-2s / SVL97-2


- Fits Cat. 1 or 2 tractor implements
- Adjustable top hook
- Universal skid plate
- Built in 2" receiver hitch
- Automatic locking

Quickly and easily attach to Cat. 1 or 2 implements that are not PTO-driven, such as box scrapers, landscape rakes, and soil pulverizers, for use as front-mounted implements. Add a ball hitch for quickly moving trailers.



The automatic lock on lower 3-point arms allows driver to stay in the seat when hooking up to an implement.

Adjustable top hook helps match up to implement.

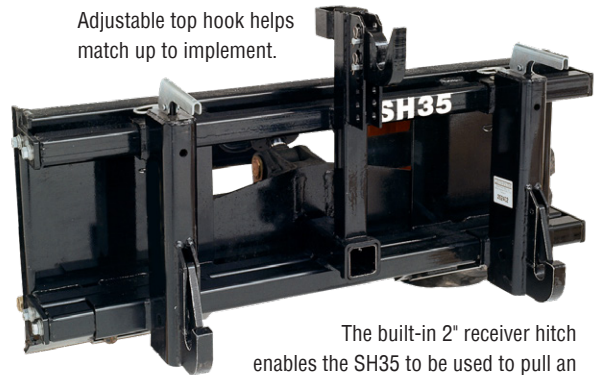

The built-in 2" receiver hitch enables the SH35 to be used to pull an implement or trailer with a ball hitch.

	SH35
Hitch	Standard category 1 & 2, 3-point with adjustable top hitch
Weight (kg)	225 lbs (102)
Overall Width (m)	46-7/8" (1.19)
Height (cm)	25" (63.5)
Length (cm)	15-1/2" (39.4)
Lower 3-Point	Automatic Lock
Max. Lift Capacity (kg)	2,800 lbs (1270) at 24" (61) from implements; lower hitch pins