


AP-SG25 Series

Specifications & Capacities		AP-SG2572	AP-SG2584
Working width	in (m)	72 (1.83)	84 (2.13)
Overall width	in (m)	81 1/4 (2.06)	93 1/4 (2.37)
Number of straight shanks		6	7
Skid steer & tractor hp requirement	hp (kW)	40-95 (29.8-70.8)	40-95 (29.8-70.8)
Unit weight with shanks	lbs (kg)	886 (401.9)	952 (431.8)
Overall length	in (m)	52 1/4 (1.33)	
Overall height	in (cm)	22 (55.9)	
Side panel height with skid shoes	in (cm)	15 1/2 (39.4)	
Side panel length	in (m)	50 (1.27)	
Side panel thickness	in (mm)	1/4 (6) Thick with 2 3/4 (70) formed edges.	
Skid shoe construction	in (mm)	3/8 (10) Thick with a formed bevel to prevent gouging.	
Straight shank construction		Heat-treated 3-position shank.	
Cutting edges	in (cm)	Four 1/2 x 6 (1.3 x 15.2) high-carbon, heat-treated blades that are reversible and replaceable.	
Cutting edge adjustment	in (cm)	Variable vertical adjustment from level grade to 1 1/2 (3.8) below grade.	
Shank adjustments	in (mm)	2 1/2 (64) and 3/4 (19) below grade level. 3/4 (19) above grade level.	
Hitch type		Skid steer mounting plate	

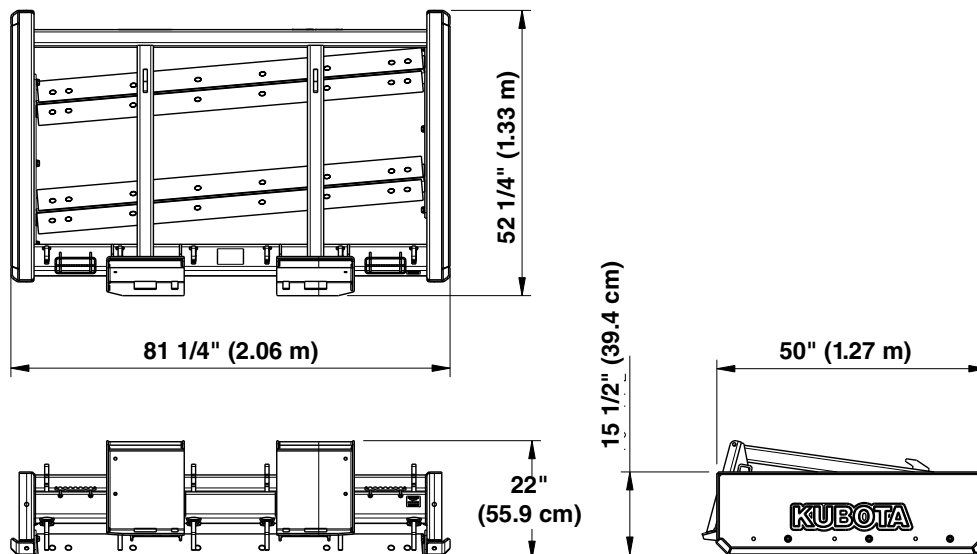

39346