


**PFL45 & PFL55 Series**  
**Specifications & Capacities**

		PFL4548	PFL5548	PFL5560
<b>Side Step</b>		Yes	Yes	Yes
<b>Weight</b>	lbs (kg)	412 (186.9)	436 (197.8)	482 (218.6)
<b>Lift Capacity</b>	lbs (kg)	4500 (2041.2)	5500 (2494.8)	
	in (cm)	Lift capacity is based on load being 24 (61) from face of frame (Cross bar). Load must be palletized and supported by two forks.		
<b>Class</b>		II		
<b>Frame Width</b>	in (m)	45 7/8 (1.17)		
<b>Frame Height</b>	in (m)	40 (1.02)		
<b>Tine Thickness</b>	in (cm)	1 1/2 (3.8)	1 3/4 (4.4)	
<b>Tine Width</b>	in (cm)	4 (10.2)		
<b>Tine Length</b>	in (m)	48 (1.22)	60 (1.52)	
<b>Fork Positioning Lock</b>		Spring Loaded Toggle		

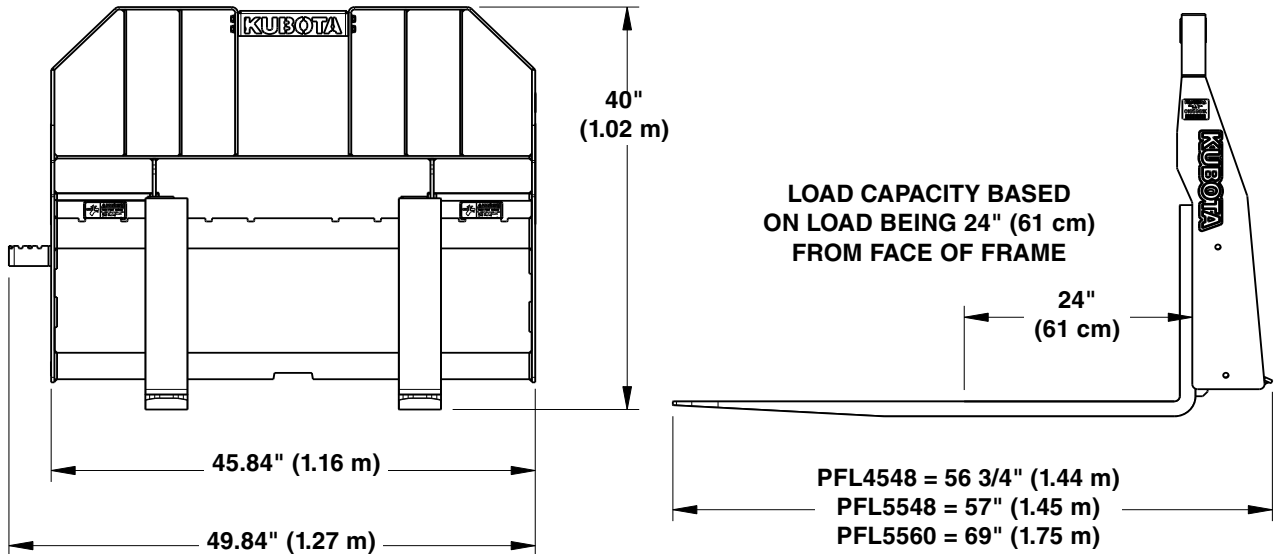

37731

**PFL4548, PFL5548, & PFL5560 Series**