
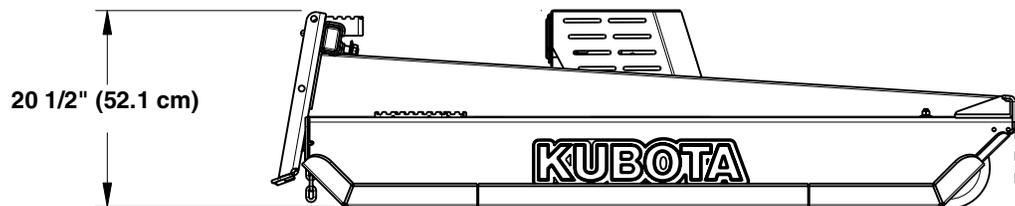


SC4060 & SC4072 Skid Steer Rotary Cutter

Specifications & Capacities			
		SC4060	SC4072
Cutter weight with skid shoes and without front roller wheels	lbs (kg)	1324 (600.6)	1634 (741.2)
Front roller wheels weight (Optional)	lbs (kg)	42 lbs (19.1)	
Optional protective door material & assembly weight	lbs (kg)	Clear polycarbonate shield 10 lbs (4.5)	
Hitch		Welded on	
Cutting width	in (m)	61.5 (1.56)	73.5 (1.87)
Overall width	in (m)	72 (1.83)	84.5 (2.15)
Overall length	in (m)	78 (1.98)	89 (2.26)
Cutting height	in (cm)	1 1/2 to 18 (3.8 to 45.7) infinitely variable.	
Cutting capacity	in (cm)	4 (10.2) Diameter	
Spindle hub oil capacity	oz (mL)	10 (296)	
Spindle hub oil		EP 80-90 wt. gearlube	
Standard drive motor	gpm (lpm)	15-26 (56.8-98.4) flow	
High volume drive motor	gpm (lpm)	27-43 (102.2-162.8) flow	
Hydraulic pressure	psi (MPa)	1500 to 3500 (10.34 to 24.13)	
Deck thickness	in (mm)	1/4 (6)	
Side skirt construction	in (mm)	1/4 (6) Steel	
Deck wear protection		Four corner mounted skid shoes and two mid skid shoes	
Skid shoes construction	in (cm)	3/8 (10) plate	
Dishpan	in (mm)	Heavy-duty round 5/8 (16) plate	
Blade size	in (cm)	1/2 x 5 (1.3 x 12.7) bi-directional	
Blade rotation		Clockwise or counter clock wise	
Blade Bolt		1 1/8"-12 x 3 7/16" with key.	
16-26 gpm motor blade tip speed	fpm (mps) gpm (lpm)	14455 (73.4) at 26 (98.4)	17345 (88.1) at 26 (98.4)
27-43 gpm motor blade tip speed	fpm (mps) gpm (lpm)	15440 (78.4) at 43 (162.8)	18,527 fpm (94.1) at 43 (162.8)
Front deck protection		Single row chain guard	
Rear deck protection		Single row chain guard	
Deck lift height protection		Height adjustment safety chain	
Front rollers (Optional)		Welded round steel wheels	

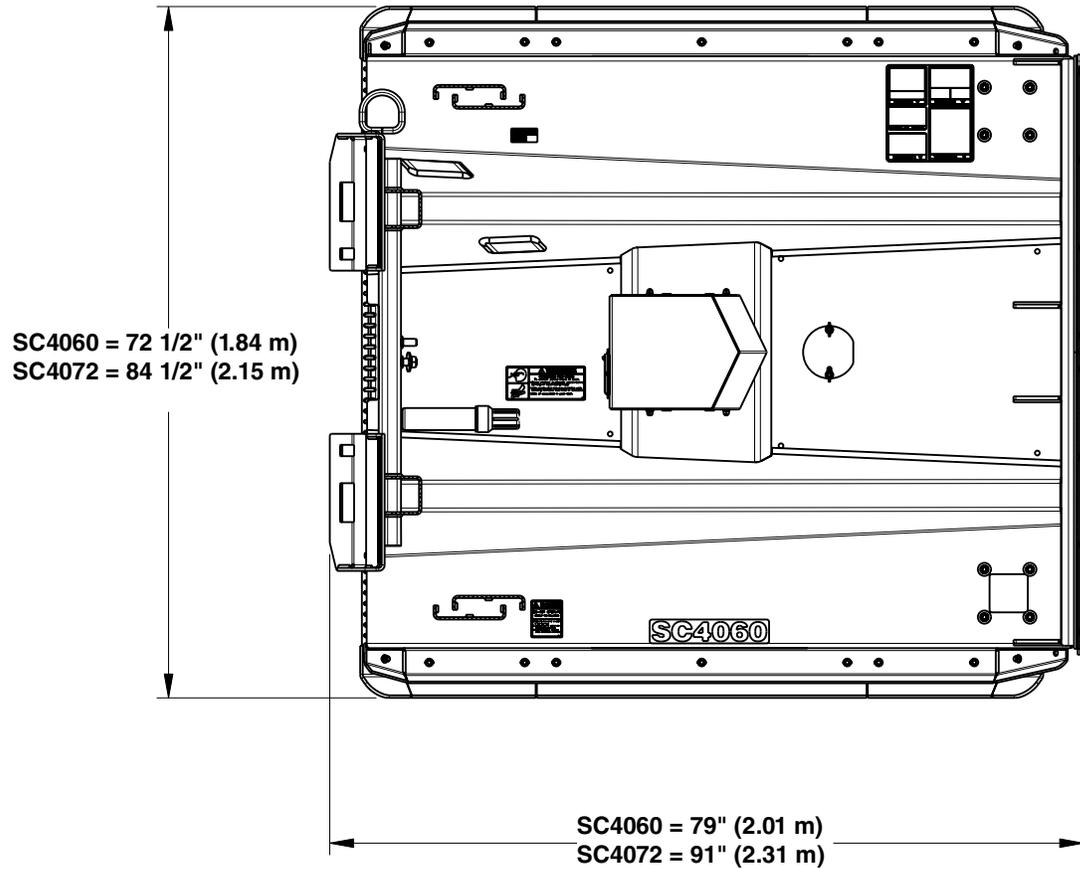

39997