


CB25 Series

Specifications & Capacities								
		CB2568		CB2574		CB2580		
Hitch type		Universal Quick Attach Hitch						
Weights	With teeth	lbs (kg)	996 (452)		1056 (479)		1147 (520)	
	Without teeth	lbs (kg)	943 (428)		1001 (454)		1090 (494)	
Optional weights	Spill guard Counterbalance valve	lbs (kg)	24 (11)		27 (12)		29 (13)	
		lbs (kg)	13 (6)		13 (6)		13 (6)	
Overall width	in (m)	71 (1.8)		77 (1.96)		83 (2.1)		
Clamshell opening	in (cm)	33 (83.8)		33 (83.8)		33 (83.8)		
Bucket capacity with and without spill guard			With	Without	With	Without	With	Without
	Struck full	ft³ (m³)	13.45 (.38)	10.09 (.29)	14.65 (.41)	10.99 (.31)	15.86 (.45)	11.89 (.34)
	Heaped full	ft³ (m³)	18.45 (.52)	15.20 (.43)	20.14 (.31)	16.61 (.47)	21.83 (.62)	18.01 (.51)
Hydraulic cylinder pins	in (cm)	1 (2.5) dia. greasable rod pivot pins						
Jaw pivot pins	in (cm)	1 1/4 (3.2) dia. greasable pivot pins						
Hydraulic cylinder	in (cm)	2.5 x 8 x 1 1/4 (6.4 x 20.3 x 3.2) Rod						
Maximum hydraulic pressure	psi (KPa)	3500 (24132)						

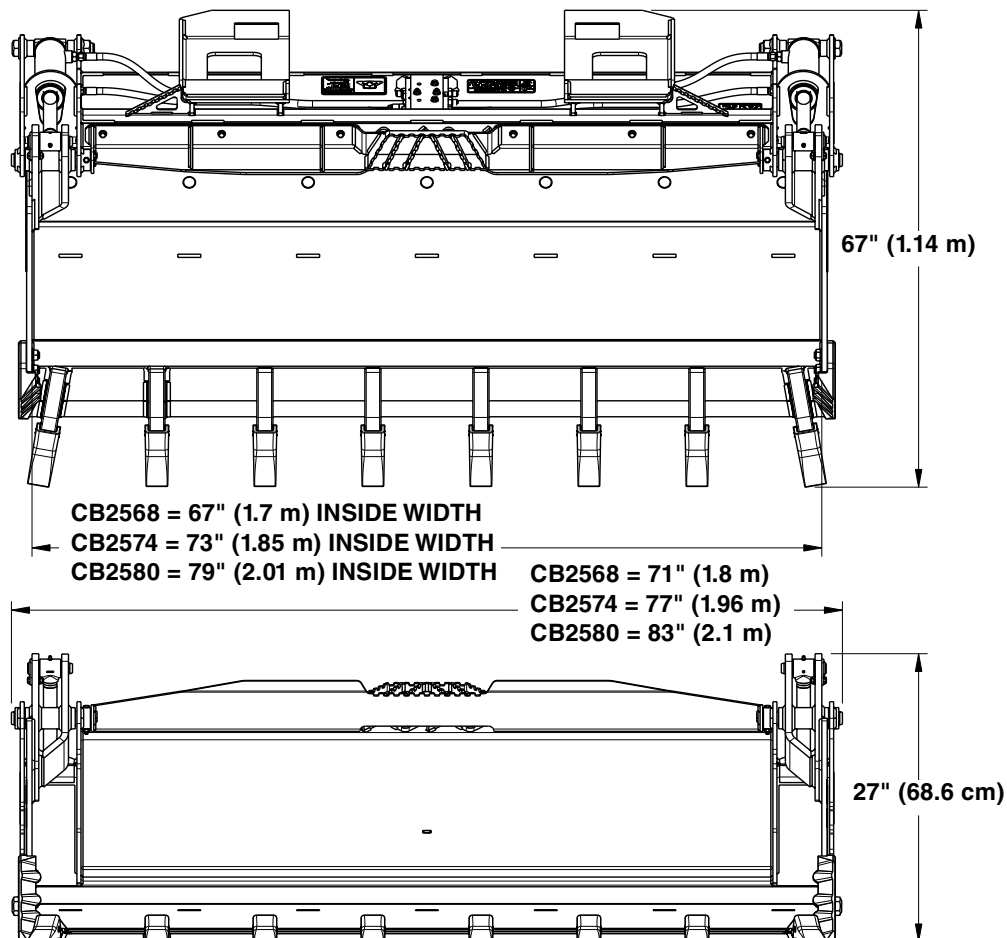

39606